


Document shredders

[Model overview](#)



EBA

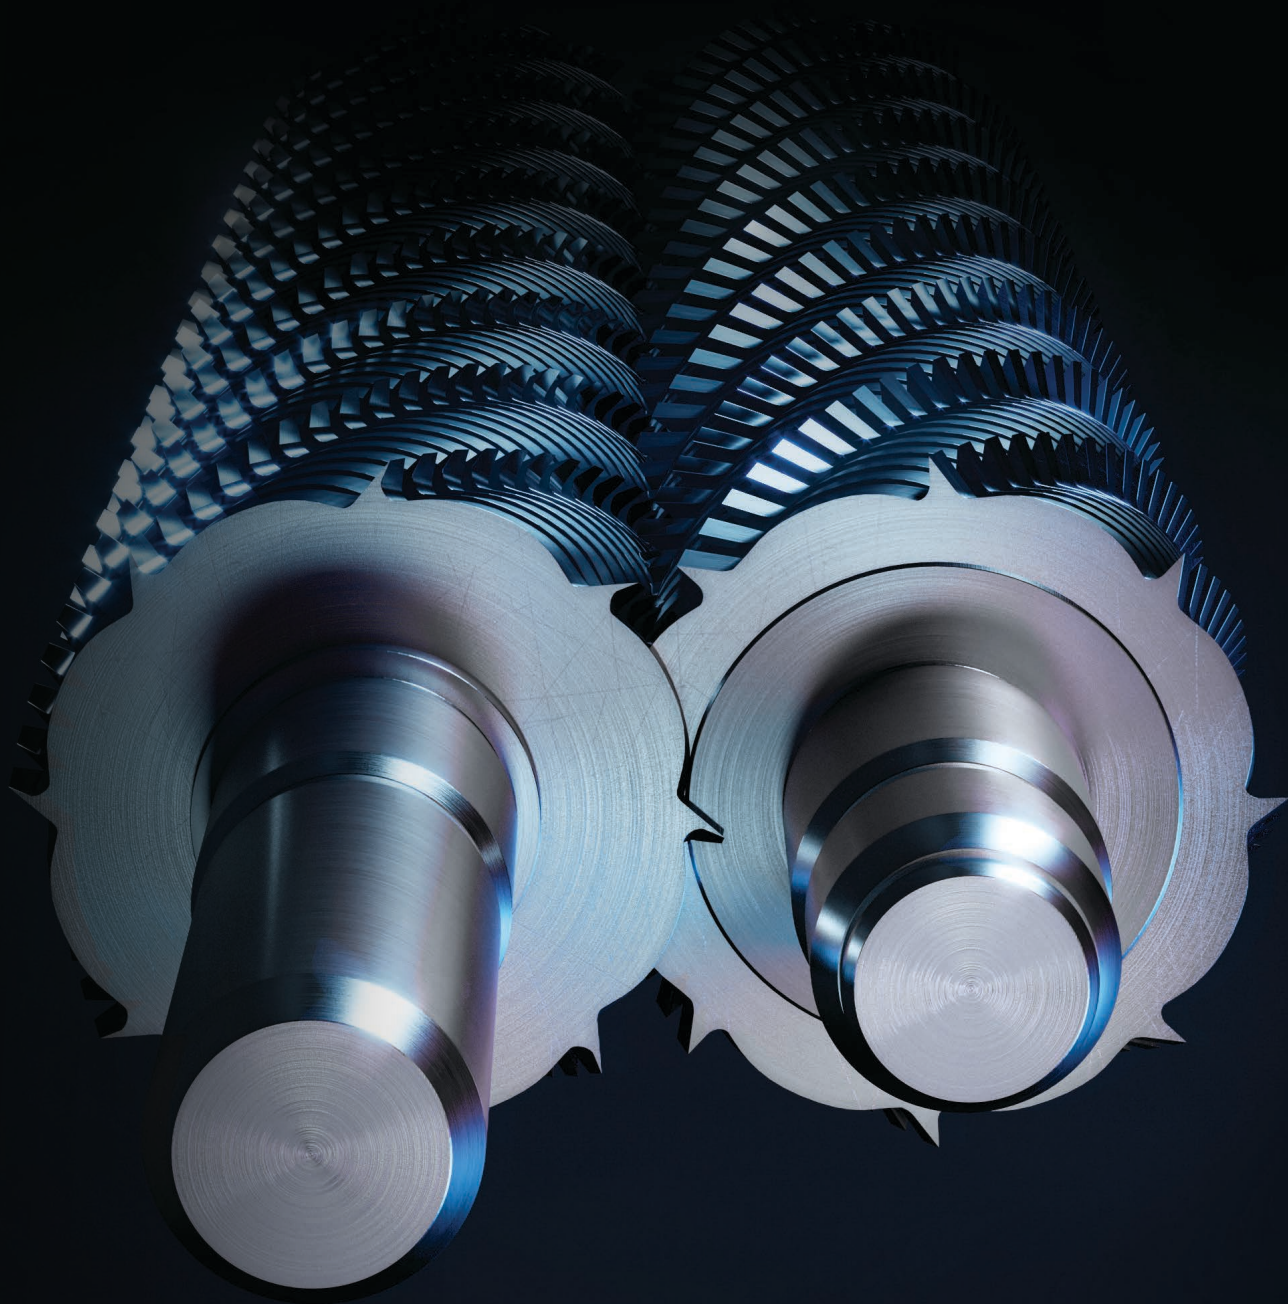

First class in data protection

When discussing data protection, people typically refer to electronically processed data. What is often forgotten: the provisions of GDPR* also apply to personalised data in paper form. Even your existing documents must correspond to the requirements of GDPR*. Stocking up on data collection is prohibited.

In accordance with GDPR, you must demonstrate that you work compliantly and adhere to the data protection requirements. Protecting the required security level through the use of document shredders will protect you from paying significant fines, will protect your good reputation, and will ensure the trust of your customers.

Update your documents. Data that may no longer be retained as per GDPR – keyword data minimisation – can be safely and reliably destroyed using a professional document shredder. Also keep in mind documents whose retention period has expired.

*GDPR – General Data Protection Regulation. Expansion of the previous data protection principles. All companies that process personalised data from EU residents, must meet the new regulations since 25 May 2018.

Deskside shredders



EBA 1120

EBA 1126

EBA 1128

EBA 1125

Model	1120 S	1126 S	1126 C	1126 C	1128 S	1128 C	1128 C	1125 S	1125 C	1125 C
Feed opening, mm	220	220	220	220	220	220	220	220	220	220
Shredder type	strip cut	strip cut	cross cut	cross cut	strip cut	cross cut	cross cut	strip cut	cross cut	cross cut
Shred width, mm	4	4	3 x 25	2 x 15	4	3 x 25	2 x 15	4	3 x 25	2 x 15
Performance in sheets, A4 paper 70 g/m ²	11-13	11-13	6-7	4-5	11-13	6-7	4-5	11-13	6-7	4-5
Performance in sheets, A4 paper 80 g/m ²	9-11	9-11	5-6	3-4	9-11	5-6	3-4	9-11	5-6	3-4
Security level DIN 66399	P-2	P-2	P-4	P-5	P-2	P-4	P-5	P-2	P-4	P-5
Shreds also	☞	☞	-	-	☞	-	-	☞ ☞	☞ ☞	☞ ☞
Paper clip proof solid steel cutting shafts	•	•	•	•	•	•	•	•	•	•
Lifetime guarantee on the solid steel cutting shafts	•	•	•	•	•	•	•	•	•	•
Automatic oiler	-	-			-			-		
Shred speed, m/sec.	0.05	0.05	0.06	0.06	0.05	0.06	0.06	0.05	0.06	0.06
Volume of cabinet in litres	-	-			20			20		
Shred bin volume in litres	20	20			20			20 (paper) / 3 (CDs/DVDs)		
Power connection, volts / Hz (single phase) ¹	230 / 50 / 1~	230 / 50 / 1~			230 / 50 / 1~			230 / 50 / 1~		
Motor capacity, W	150	150			150			150		
Automatic start/stop via photo cell	-	•			•			•		
Control element	multifunction	EASY-TOUCH			EASY-TOUCH			multifunction		
SSC – Smart Shred Control	-	-			-			-		
SPS Safety Protection System:	-	-			-			-		
– Patented safety flap in the feed opening	mechanical	mechanical			mechanical			mechanical		
– Automatic reverse / automatic power cut-off	-	•			•			-		
– Automatic cut-off if shred bin is full	-	-			-			-		
– Electronic door protection	-	-			-			-		
– Double motor protection	•	•			•			•		
– ZERO ENERGY standby mode	-	•			•			-		
Awarded the "Blue Angel" for high energy efficiency	-	•			•			-		
Mobile on castors	-	-			-			-		
Dimensions, mm (H x W x D)	452 x 345 x 215	428 x 345 x 213			516 x 345 x 213			537 x 345 x 220		
Weight, kg	6	6.5	7.5	7.5	10.5	11.5	11.5	12.5	13.0	13.0

¹ other voltages available

☞ credit cards
 ☞ CDs/DVDs













EBA 1

EBA 1624

EBA 1824

EBA 1824 JUMBO

EBA 1	1624 S	1624 C	1624 C	1624 CC	1624 CCC	1824 S	1824 C	1824 C	1824 C	1824 C
240	240	240	240	240	240	240	240	240	240	240
cross cut	strip cut	cross cut	cross cut	fine cut	fine cut	strip cut	cross cut	cross cut	cross cut	cross cut
2 x 15	4	4 x 40	2 x 15	0.8 x 12	0.8 x 5	4	4 x 40	2 x 15	4 x 40	2 x 15
10-12	19-21	13-15	10-12	4-6	4-5	22-24	16-18	11-13	16-18	11-13
8-10	16-18	11-13	8-10	3-5	3-4	19-21	13-15	9-11	13-15	9-11
P-5	P-2	P-4	P-5	P-6	P-7	P-2	P-4	P-5	P-4	P-5
				-	-	 				
•	•	•	•	-	-	•	•	•	•	•
•	•	•	•	-	-	•	•	•	•	•
-	-	optional	optional	optional	optional	-			-	
0.06	0.07	0.06	0.06	0.07	0.07	0.09	0.10	0.10	0.10	0.10
25	50					50			100	
25	35					35			75	
230 / 50 / 1~	230 / 50 / 1~					230 / 50 / 1~			230 / 50 / 1~	
390	390					580			580	
•	•					•			•	
EASY-SWITCH	EASY-SWITCH					EASY-SWITCH			EASY-SWITCH	
-	•					•			•	
•	•					•			•	
electronic	electronic					electronic			electronic	
•	•					•			•	
•	•					•			•	
•	•					•			•	
•	•					•			•	
-	•					•			•	
-	•					•			•	
-	•					•			•	
600 x 410 x 240	635 x 395 x 291					635 x 395 x 291			850 x 500 x 374	
23.5	21					22			26	



Office shredders




EBA 2127

EBA 2326

EBA 2331

Model	2127 S	2127 C	2127 C	2326 S	2326 C	2326 C	2326 CC	2326 CCC	2331 S	2331 C	2331 C
Feed opening, mm	260	260	260	260	260	260	260	260	310	310	310
Shredder type	strip cut	cross cut	cross cut	strip cut	cross cut	cross cut	fine cut	fine cut	strip cut	cross cut	cross cut
Shred width, mm	4	4 x 40	2 x 15	4	4 x 40	2 x 15	0.8 x 12	0.8 x 5	4	4 x 40	2 x 15
Performance in sheets, A4 paper 70 g/m ²	21-23	16-18	10-12	30-32	25-27	15-17	8-10	5-7	30-32	25-27	15-17
Performance in sheets, A4 paper 80 g/m ²	18-20	13-15	8-10	26-28	21-23	13-15	6-8	4-6	26-28	21-23	13-15
Security level DIN 66399	P-2	P-4	P-5	P-2	P-4	P-5	P-6	P-7	P-2	P-4	P-5
Shreds also							-	-			
Paper clip proof solid steel cutting shafts	•	•	•	•	•	•	-	-	•	•	•
Lifetime guarantee on the solid steel cutting shafts	•	•	•	•	•	•	-	-	•	•	•
Automatic oiler	-			-	optional	optional	optional	optional	-	optional	optional
Shred speed, m/sec.	0.09	0.10	0.10	0.08	0.10	0.10	0.09	0.09	0.08	0.10	0.10
Volume of cabinet in litres	100			125					140		
Shred bin volume in litres	75			100					120		
Power connection, volts / Hz (single phase) ¹	230 / 50 / 1~			230 / 50 / 1~					230 / 50 / 1~		
Motor capacity, W	580			640					640		
Automatic start/stop via photo cell	•			•					•		
ECC – Electronic Capacity Control	-			•					•		
Control element	EASY-SWITCH			EASY-SWITCH					EASY-SWITCH		
SPS Safety Protection System:	•			•					•		
– Patented safety flap in the feed opening	electronic			electronic					electronic		
– Automatic reverse / automatic power cut-off	•			•					•		
– Automatic cut-off if shred bin is full	•			•					•		
– Electronic door protection	•			•					•		
– Double motor protection	•			•					•		
– Zero energy standby mode	•			•					•		
Awarded the “Blue Angel” for high energy efficiency	•			•					•		
High quality wooden cabinet, mobile on swivel castors	•			•					•		
Dimensions, mm (H x W x D)	870 x 500 x 377			926 x 495 x 470					930 x 538 x 470		
Weight, kg	30	30.5	30.5	48					52		

¹ other voltages available





EBA 5131

EBA 2339

EBA 3140

EBA 5141

5131 C	5131 C	5131 CCC	2339 S	2339 C	2339 C	3140 S	3140 C	3140 C	5141 S	5141 C	5141 C	5141 CC	5141 CCC
310	310	310	400	400	400	400	400	400	405	405	405	405	405
cross cut	cross cut	fine cut	strip cut	cross cut	cross cut	strip cut	cross cut	cross cut	strip cut	cross cut	cross cut	fine cut	fine cut
4 x 40	2 x 15	0.8 x 5	6	4 x 40	2 x 15	6	4 x 40	2 x 15	6	4 x 40	2 x 15	0.8 x 12	0.8 x 5
40-45	25-30	11-12	25-28	19-22	10-13	39-41	28-30	16-18	50-55	40-45	25-30	15-17	10-11
34-39	21-26	9-10	21-24	16-19	8-11	33-35	23-25	13-15	42-47	34-39	21-26	13-15	8-9
P-4	P-5	P-7	P-2	P-4	P-5	P-2	P-4	P-5	P-2	P-4	P-5	P-6	P-7
		-										-	-
•	•	-	•	•	•	•	•	•	•	•	•	-	-
•	•	-	•	•	•	•	•	•	•	•	•	-	-
standard			-			-	optional	optional	standard				
0.15	0.15	0.15	0.10	0.13	0.13	0.10	0.13	0.13	0.19	0.15	0.15	0.15	0.18
180			210			210			210				
140			165			165			165				
230 / 50 / 1~			230 / 50 / 1~			230 / 50 / 1~			230 / 50 / 1~				
1600			640			1300			1600				
•			•			•			•				
•			•			•			•				
EASY-SWITCH			EASY-SWITCH			EASY-SWITCH			EASY-SWITCH				
•			•			•			•				
electronic			electronic			electronic			electronic				
•			•			•			•				
•			•			•			•				
•			•			•			•				
•			•			•			•				
•			•			•			•				
•			•			•			•				
1020 x 548 x 590			970 x 640 x 590			970 x 640 x 590			1010 x 640 x 590				
102			79	84	84	82	87	87	115				















High capacity shredders







EBA 5300

EBA 5346

Model	5300 C	5300 C	5346 C	5346 C
Feed opening, mm	460	460	460	460
Shredder type	cross cut	cross cut	cross cut	cross cut
Shred width, mm	6 x 50	2 x 15	6 x 50	2 x 15
Performance in sheets, A4 paper 70 g/m ²	85-95	35-45	85-95	35-45
Performance in sheets, A4 paper 80 g/m ²	74-83	30-39	74-83	30-39
Security level DIN 66399	P-3	P-5	P-3	P-5
Shreds also	  	  	  	  
Shredding head takes soft metal objects	•	•	•	•
Guarantee on the cutting shafts	2 years	2 years	2 years	2 years
Shred speed, m/sec.	0.17		0.17	
Oil injection on the cutting shafts (standard equipment)	automatic		automatic	
Shred collection in	mobile shred bin		mobile shred bin	
Capacity for shreds, litres	230		230	
Power connection, volts / Hz (three phase) ¹	400 / 50 / 3P+N+PE		400 / 50 / 3P+N+PE	
Motor capacity, kW	2.2		2.2	
Automatic start/stop via photo cell	•		•	
Control element	EASY-SWITCH		EASY-SWITCH	
Illumination of the working area	•		•	
Automatic reverse / automatic power cut-off	• / •		• / •	
Automatic cut-off if shred bag is full	•		•	
Electronic door protection	•		•	
Thermal overload switch	•		•	
Automatic standby after 30 minutes	•		•	
Movable on castors	•		•	
Dimensions, mm (H x W x D)	1230 x 740 x 765		1700 x 740 x 765	
Weight, kg	244		253	
Accessories (optional):	Modular conveyor belt system		-	
	Second shred trolley		-	

¹ other voltages available

-  credit cards
-  CDs/DVDs
-  diskettes
-  lever arch files



EBA 6340



EBA 7050

6340 S	6340 C	6340 C	7050-2 C	7050-3 C
410	410	410	500	500
strip cut	cross cut	cross cut	cross cut	cross cut
6	6 x 50	2 x 15	8 x 40-80	6 x 50
100-120	85-100	43-48	600-700	300-400
87-105	74-87	37-42	500-600	250-350
P-2	P-3	P-5	P-2	P-3
•	•	•	•	•
2 years	2 years	2 years	2 years	2 years
0.26			0.21 / 0.12 (variable shred speed »2-MATIC«)	
automatic			manual	
suspension for disposable plastic bags with pull-out mechanism on wheels			shred trolley	
300			300	
400 / 50 / 3P+N+PE			400 / 50 / 3P+N+PE	
4.0	3.0	3.0	9.0 (2 x 4.5)	
-			-	
EASY-SWITCH			panel with push buttons	
•			-	
• / •			• / •	
•			•	
•			•	
•			•	
•			-	
•			•	
1440 x 1240/690 ² x 1700			1714 x 1036 x 2170/3070 ³	
357			1130	
-			•	
-			•	

² transportation width (without side tables)

³ depth with conveyor belt system

First class quality

EBA quality is world-famous. It originates from the edge of the Swabian Alb, from Balingen to be precise. Here, premium shredders are manufactured with an exceptionally high in-house production depth - renowned for their durability, operational safety and sophisticated functionality.

One of the most appealing features of EBA quality is its distinctive design. With classic form, clear lines and timeless elegance, EBA shredders fit seamlessly into every environment.

Top-quality materials, state-of-the-art manufacturing processes and stringent quality controls guarantee that in the future too the EBA brand will stand for its more than 95 year-old hallmark:

[Quality made in Germany.](#)

MADE IN GERMANY

SINCE 1922

Exceptional quality, reliability and innovative design are what our global customers expect of our products. Benefit from our branded quality Made in Germany supported by a certified Quality Management System according to DIN EN ISO 9001:2015.

LIFETIME GUARANTEE

ON CUTTING SHAFTS

Robust and durable: the cutting heads of EBA shredders are equipped with special hardened, solid steel cutting shafts. We grant a lifetime guarantee of these high-quality cutting shafts under conditions of fair wear & tear (except fine cut and three phase models).

ECO

FRIENDLY

Sustainability has always played a major role in EBA's corporate philosophy. Only first-class, sustainably produced materials are built into our products. We have implemented a certified Environmental Management System according to DIN EN ISO 14001:2015 and a certified Energy Management System which proof that we care about the environment.

TOP SERVICE

QUALITY

We offer professional assistance to handle any questions or technical problems. Moreover, we guarantee that even after a device "Made in Germany" has been discontinued, spare parts will remain available for at least 15 years (from model year 2012).

ZERO ENERGY

STANDBY MODE

The environmentally-friendly energy saving function of our shredders, the ZERO ENERGY standby mode, ensures automatic and complete power cut-off after 15 minutes.

ECC

CONTROL

We set new standards in terms of quality and efficiency through innovative technologies such as the patented ECC – Electronic Capacity Control: this electronic feature indicates the used sheet capacity during shredding process to avoid paper jams.

EASY SWITCH

TECHNOLOGY

Ease of operation: EASY-SWITCH is an intelligent control element indicating the operational status of the shredder with varying colour codes and back-lit symbols.

EASY TOUCH

TECHNOLOGY

Easy operation is guaranteed with the EASY-TOUCH multifunction switch for stand-by / stop (off) / reverse and optical signals for the operational status of the shredder models EBA 1126 and EBA 1128.

SSC

CONTROL

SSC - Smart Shred Control: That's fun – shredding without paper jams! A smiley on the EASY-SWITCH element has a capacity control function: If it shines green, everything is ok.

SPS

SAFETY

EBA shredders are particularly safe and easy to operate. In this connection, the SPS (Safety Protection System) can certainly be seen as an important milestone. SPS features include, for example, a patented, electronically controlled safety flap in the feed opening; automatic reverse and power cut-off (avoids paper jams); automatic stop if the shred bin is full; electronic door protection; double motor protection against overheating.

